


Autodiallers | emFONE EM-1

Easy emFONE - easy to fit, easy to use

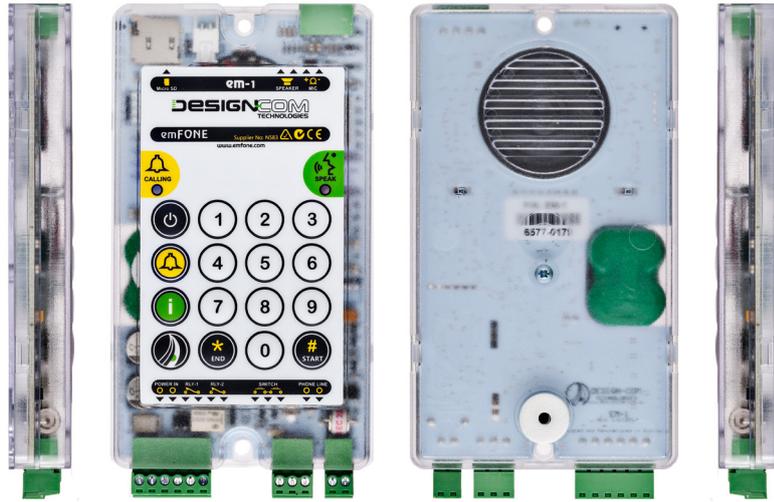

Features & Benefits

- AC or DC powered and battery backed.
- Easy installation and configuration
- Easy fault diagnostics
- Crystal clear communication
- Programmable up to 3 numbers
- Operates on analogue phone line or GSM
- Healthcheck software available
- Telephone line and power supply diagnostics with voice alerts
- Caller progression
- Two relays with fully programmable feature, relays for pictograms
- Programmable talk time, automatically cuts call after period of no communication.
- Programmable alarm button timer - standard 3 seconds
- Autodialler activation - scream alert

emFONE EM-1

The very latest addition to the emFONE family of products is now available in the UK.

The NEW EM-1 emFONE lift autodialler has been designed to meet the requirements of the lift retrofit markets.

With its low price, easy installation and next day delivery*, it provides the lift industry with a cost effective solution. Providing peace of mind knowing that EM-1 is part of the well established emFONE family of products.

The compact unit includes a built-in microphone and speaker and provides simple setup either remotely or via keypad reducing time and training requirements.

Lift location is identified by a remotely/locally recorded voice message of up to 16 seconds which is played upon answer of the call.

EM-1



	EM-1
Operating Voltage:	10V-30V (DC), 9V-20V (AC)
Operating Current:	10mAmps (Standby) 200mAmps (Operating)
Operating Temperature:	0°C to 75°C
Relay Voltage	2A/30VDC
Telephone Line Voltage:	24V - 50V DC (analogue)
Speaker Volume:	8Ω Programmable - 1 Watt (max) / 80dB Level at 1 meter - 425 Hz
Message length:	16 seconds, user programmable remotely
Trigger Button:	2 x Dry contacts - optically isolated
Self Diagnostic - Lift Car Message Alerts:	Phone Line Failure - Every 5 minutes Power Supply Fault - Every 15 minutes
Telephone Line Current:	20mAmp - 90mAmp
Dialling method:	Tone (DTMF) 16-Digit Dialing Capability
Back-up battery System:	Nickel-Metal Hydride Battery Backup

PRODUCT PROFILE

Options

- External speaker/microphone
- Easy fit faceplate for retrofit works
- Pictograms
- Loop Induction Kit
- GSM option with or without sim card
- Installation and commissioning
- LiftCall24 - 24 hour bureau service
- Healthcheck Software