

# keypad

## En-Pad type 2



### En-Pad type 2

The new En-Pad has been designed to meet the requirements for destination control type lifts with keypads and is ideal for apartment buildings, offices, hotels and many other applications. The keypad fully meets the requirements of EN81-70, having contrast between the legend and the key. The En-Pad has a very low profile and can be easily incorporated into landing fixtures. It also meets the category 2 requirements of vandal resistant lift code EN81-71.

### Key features

- Numerical keys are black anodised with moulded through tactile opal legends
- Star key is green anodised with moulded through tactile opal legend
- Minus key is red anodised with moulded through tactile opal legend
- Wheelchair symbol key is blue anodised with moulded through tactile opal legend
- All keys can be back light illuminated (standard colour - white)
- Satin chrome die-cast body
- High contrast between legend and keys
- Vandal resistant

#### Dewhurst UK Limited



Unit 9, Hampton Business Park  
Feltham  
TW13 6DB  
United Kingdom

**Tel:** +44(0) 20 8744 8200  
**Fax:** +44(0) 20 8744 8299  
**Email:** [info@dewhurst.co.uk](mailto:info@dewhurst.co.uk)

[www.dewhurst.co.uk](http://www.dewhurst.co.uk)

# specification

## En-Pad type 2

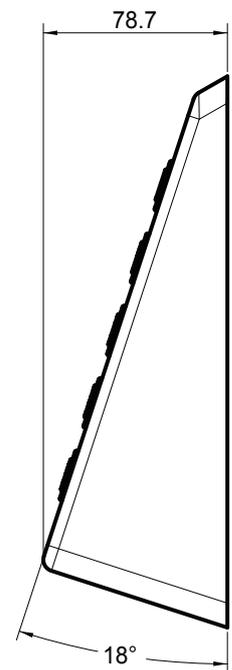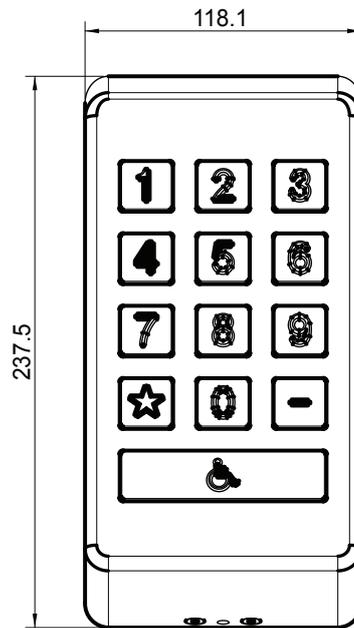

This product is designed to meet the requirements of the following codes and regulations either in its standard form or through variants:

EN81-20/50	✓
BS8300	✓
M2/S2	✓
EN81-70	✓
B44	X
EN81-71	Category 2
AS1735.12	X
EN81-72	✓
A117.1	X
EN81-73	✓
EN60529	IP67

For more information on our keypad range contact us at:

**Dewhurst UK Limited**  
 Unit 9, Hampton Business Park  
 Feltham  
 TW13 6DB  
 United Kingdom

Tel: +44(0) 20 8744 8200  
 Fax: +44(0) 20 8744 8299  
 Email: [info@dewhurst.co.uk](mailto:info@dewhurst.co.uk)  
[www.dewhurst.co.uk](http://www.dewhurst.co.uk)

### technicals

- Anodised aluminium keys
- Tactile characters moulded in high grade polycarbonate
- Angled body is a high pressure zinc alloy die-casting
- Environmental protection to IP67
- Matrix contact configuration as standard
- A detailed data sheet for this product can be found on our website

### benefits

- 16mm high tactile characters
- Easy to install - through fascia mounting

### options

- Custom contact configurations possible
- Other connector options possible
- Other illumination colours possible