

indicators

Mirror Blade ID



Lift Car Indicator - Mirror Blade ID

The new Mirror Blade Identifier again clearly identifies the lift that a user has been assigned to. The ID has a very smart appearance of clear glass and is highly visible in a lift lobby. Illumination options depend on how the system is operated but the Blade can illuminate permanently, or on arrival. It can also link to a gong/speaker. The new Mirror Blade ID Indicator provides a contemporary design for car identification, ideally suited to prestigious office and apartment buildings. The protruding Mirror Blade ID provides a highly visible illuminated legend to show the lift car identification, it is an ideal product for destination control lift systems.

The units design looks 'custom' but this is a standard production unit that offers excellent value for money.

Key features

- Provides your lift with custom appearance
- Innovative design, with high visibility legend
- Smart unique appearance
- Range of character colours available
- Various mounting options
- High contrast between legend and blade background
- Custom design LED pocket giving full consistent lighting and intensity


Dewhurst UK Limited
Unit 9, Hampton Business Park
Feltham
TW13 6DB
United Kingdom

Tel: +44(0) 20 8744 8200
Fax: +44(0) 20 8744 8299
Email: info@dewhurst.co.uk

www.dewhurst.co.uk

specification

Mirror Blade ID

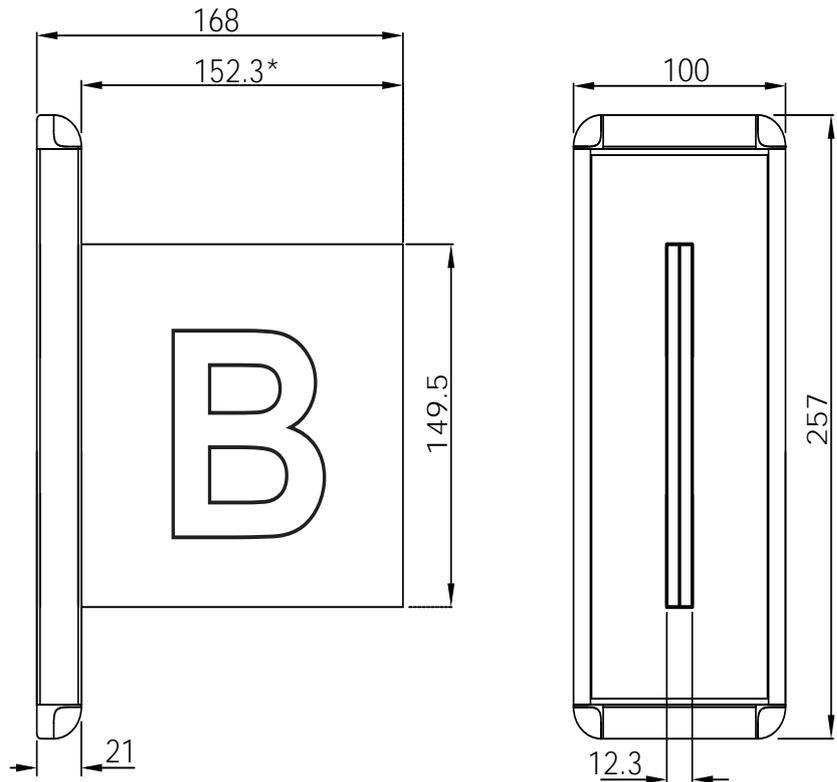

*This dimension will change depending on the faceplate material thickness

This product is designed to meet the requirements of the following codes and regulations either in its standard form or through variants:

EN81-20/50	✓
BS8300	✓
M2/S2	✓
EN81-70	✓
B44	✓
EN81-71	Category 0
AS1735.12	✓
EN81-72	X
A117.1	✓
EN81-73	X
EN60529	IP40

For more information on our indicator range contact us at:

Dewhurst UK Limited
Unit 9, Hampton Business Park
Feltham
TW13 6DB
United Kingdom

Tel: +44(0) 20 8744 8200
Fax: +44(0) 20 8744 8299
Email: info@dewhurst.co.uk
www.dewhurst.co.uk

technicals

- Character / legend height 75 mm (standard)
- 24V d.c. options available
- Typical current @ 24V = 120mA
- Illumination via high brightness LED's (long life -100,00 hours)
- Dimensions of blade [side view] is 152.3 mm W x 149.5 mm H
- Dimensions of blade [front view] is ~12.3 mm W x 149.5 mm H
- Blade material - Co-bonded laminated glass

benefits

- Innovative design, enhances lift installation
- Wide viewing angle
- DDA compliant
- Long-life LED illumination (100,000 hours)
- Can be surface mounted

options

- Illumination options – white, blue, red & green
- Optional gong/speaker can be provided at extra cost
- Flush and custom fixtures are available on request

